## INDIUM CORPORATION®

## **Product Data Sheet**

# Wafer Flux WS-3401

#### Features

- · Water-soluble
- Viscosity suitable for 150-300 mm wafers
- No residue after multiple reflow/cleaning cycles
- Uniform bump shape
- · Halide-free
- Suitable for SnPb and Pb-free, and high temperature applications
- Non-corrosive to underbump metallization

#### Introduction

**Wafer Flux WS-3401** is a low viscosity semiconductorgrade flux, specifically optimized to remove surface oxides from solder bumps on wafers. Working with the natural surface tension of solder, **WS-3401** produces uniform hemispherical bumps without solder-robbing or solderbridging. The rheology is suited to both spin-coat and spray applications.

### **Properties**

Property	Value	Test Method
Flux Type Classification:	МО	J-STD-004(IPC-TM-650: 2.3.32 and 2.3.33)
Typical Viscosity:	42cst	Cannon-Fenske viscometer
SIR (ohms, post cleaning):	Pass (>10 <sup>9</sup> after 7days @85°C and 85% RH)	J-STD-004 (IPC-TM-650: 2.6.33 IPC-B-24)
Typical Acid Value:	60mg KOH/g	Titration
Color:	Amber to Brown	Visual
Shelf Life:	6 months	0°C to +25°C


All information is for reference only. Not to be used as incoming product specifications.

## **Application**

**WS-3401** can be applied by standard spray and spincoating techniques.

For spin-coating applications, an initial rotation speed should be used to spread this liquid flux uniformly onto the wafer. Next, a velocity rotation ranging from 15 rpm to 800 rpm based on the application should be used. The wafer size, topology, pitch, and the flux application are all variations that would impact the rotation velocity. This velocity rotation should be used to thin the flux and remove the excess flux from the wafer surface.

For spray applications, the equipment flux storage tank should hold enough flux for one 8-hour shift. Additional flux remaining in the tank may expire (pot life >8 hours at room temperature) if left for a prolonged amount of time. Spray equipment should also be cleaned frequently to ensure the highest level of purity with this or any other flux.

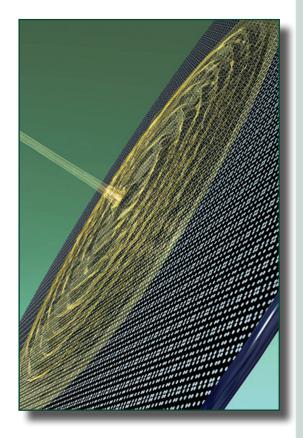

## Cleaning

**WS-3401** is designed to be cleaned with DI water or water with an added cleaner. Ideal conditions for spray cleaning are 25 °C or higher for >1 minute at >60psi.

#### **Packaging**

**WS-3401** is available in containers from 100g to 3.2kg (1 gallon). Other packaging can be provided to meet specific requirements.

#### Storage

**WS-3401** containers should be stored at 0°C to 25°C for maximum shelf life. Storage temperatures should not exceed 25°C for more than 4 days, and should never exceed 30°C. After removing from cold storage, **WS-3401** should be allowed to stand for at least 4 hours at room temperature before using.

**OVER** >

Form No. 98197 (A4) R2

www.indium.com askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678

CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400 USA: Utica, Clinton, Chicago: +1 315 853 4900





## INDIUM CORPORATION®

## Wafer Flux WS-3401


### Technical Support

Indium Corporation sets the industry standard in providing rapid response, on-site technical support for our customers worldwide. Indium Corporation's team of Technical Support Engineers can provide expertise in all aspects of materials science and semiconductor packaging process applications.

#### Material Safety Data Sheets

The MSDS for this product can be found online at: http://www.indium.com/techlibrary/msds.php

#### Reflow



The above profile is recommended as a starting point for 300mm wafers with SnAg solder microbumps, and should be optimized by the user to meet their individual process needs. Wafers should be reflowed in a nitrogen atmosphere (<10ppm  $O_2$  is recommended, but <20ppm  $O_2$  may be feasible; however, results may not be optimal). Note that bridging or solder thieving may be seen for fine pitch microbumps (<60microns) on copper pillars, and that reducing the peak temperature will reduce the occurrence of this failure mode.

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance

of the products described which are sold subject exclusively to written warranties and limitations thereon included in product packaging and invoices.

#### www.indium.com askus@indium.com

ASIA: Singapore, Cheongju: +65 6268 8678

CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400 USA: Utica, Clinton, Chicago: +1 315 853 4900



